

. . .

•

•

. •

.

ATN and ABN Blast Nozzles

0

• •

.

.....

. 0

• •

.

•

.

• • •

•

•

•

.

.

.

....

.

.



Complementary Products





AirFlo Pneumatic Handle



Product Features

PanBlast[™] aluminum jacketed Long Series Nozzles are general purpose blast nozzles, suitable for a wide range of abrasive blasting applications and designed for cost effectiveness. All ATN series nozzles feature tungsten carbide inserts for durablility and water

.

.

.

.....

•

• • •

• • • • • •

• • • • • • •

• • • • • •

• • •

.

.


. .

.

- All other sizes feature a 32mm (1-1/4") throat entry.

Common Applications

- In situ blasting in shipyards and slipways.

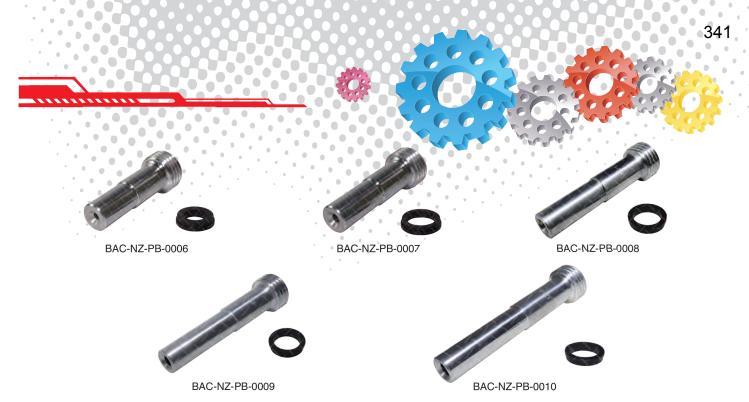

PanBlast™ ATN Tungsten Carbide Nozzles

Stock Code	Description	Orifice	Length	Entry	Weight
BAC-NZ-PB-0006	Blast Nozzle ATN-4 Aluminum/Tungsten	Φ6.4 mm (1/4")	135 mm (5-5/16")	25 mm (1")	0.80 kg (1.76 lbs)
BAC-NZ-PB-0007	Blast Nozzle ATN-5 Aluminum/Tungsten	Φ8 mm (5/16")	145 mm (5-3/4")	32 mm (1-1/4")	0.80 kg (1.76 lbs)
BAC-NZ-PB-0008	Blast Nozzle ATN-6 Aluminum/Tungsten	Φ9.5 mm (3/8")	175 mm (6-7/8")	32 mm (1-1/4")	0.82 kg (1.81 lbs)
BAC-NZ-PB-0009	Blast Nozzle ATN-7 Aluminum/Tungsten	Φ11 mm (7/16")	200 mm (7-7/8")	32 mm (1-1/4")	1.00 kg (2.20 lbs)
BAC-NZ-PB-0010	Blast Nozzle ATN-8 Aluminum/Tungsten	Φ12.5 mm (1/2")	225 mm (8-7/8")	32 mm (1-1/4")	1.05 kg (2.31 lbs)







BAC-NZ-PB-0017



BAC-NZ-PB-0018



BAC-NZ-PB-0019



BAC-NZ-PB-0020

PanBlast[™] ABN Boron Carbide Nozzles

Stock Code	Description	Orifice	Length	Entry	Weight
BAC-NZ-PB-0016	Blast Nozzle ABN-4 Aluminum/Boron	Φ6.4 mm (1/4")	135 mm (5/16")	25 mm (1")	0.40 kg (0.88 lbs)
BAC-NZ-PB-0017	Blast Nozzle ABN-5 Aluminum/Boron	Φ8 mm (5/16")	145 mm (5-3/4")	32 mm (1-1/4")	0.40 kg (0.88 lbs)
BAC-NZ-PB-0018	Blast Nozzle ABN-6 Aluminum/Boron	Φ9.5 mm (3/8")	175 mm (6-7/8")	32 mm (1-1/4")	0.41 kg (0.90 lbs)
BAC-NZ-PB-0019	Blast Nozzle ABN-7 Aluminum/Boron	Φ11 mm (7/16")	200 mm (7-7/8")	32 mm (1-1/4")	0.50 kg (1.10 lbs)
BAC-NZ-PB-0020	Blast Nozzle ABN-8 Aluminum/Boron	Φ12.5 mm (1/2")	225 mm (8-7/8")	32 mm (1-1/4")	0.52 kg (1.15 lbs)

All data and information subject to change without prior notice. Brochure reference CAT-1502-01-00